

Client	<b>Voltage Onsite</b> 208v <input type="checkbox"/> 240v <input type="checkbox"/> 277v <input type="checkbox"/>	<b>Hz</b> 60 Hz <input type="checkbox"/> (N. America) 50 Hz <input type="checkbox"/> (Overseas)
Sales Order #	<b>ELC</b> Yes <input type="checkbox"/> No <input type="checkbox"/>	<b>ACL / Zone Control Units</b> Qty. <input type="text"/>
BDM Name	<b>Vestibule Lighting (1-20" LED Per Vestibule)</b> Yes <input type="checkbox"/> No <input type="checkbox"/> Qty. <input type="text"/> 10' <input type="checkbox"/> 14.3' <input type="checkbox"/> 19.2' <input type="checkbox"/>	<b>Lighting Control Plan</b> Yes <input type="checkbox"/> No <input type="checkbox"/>
		<b>Corridor Lighting? (5"x6" I-Beam)</b> Yes <input type="checkbox"/> No <input type="checkbox"/> Qty. <input type="text"/> 10' <input type="checkbox"/> 14.3' <input type="checkbox"/> 19.2' <input type="checkbox"/>



# Stellar

## RT Series

LED Linear Lighting System

**Product Certification**

### 208V Fixtures

Qty	✓	Fixture	Lumens	Watts	Amps	Current ATHD	PF	Efficacy (lm/w)
<input type="text"/>	<input type="checkbox"/>	RT20L-208V	5500	55	0.33	69.7%	0.82	100
<input type="text"/>	<input type="checkbox"/>	RT40L-208V	11000	111	0.65	69.5%	0.82	100
<input type="text"/>	<input type="checkbox"/>	RT60L-208V	16200	165	0.97	69.1%	0.82	100
<input type="text"/>	<input type="checkbox"/>	RT80L-208V	21400	218	1.28	N/A	0.82	100

### 240V Fixtures


Qty	✓	Fixture	Lumens	Watts	Amps	Current ATHD	PF	Efficacy (lm/w)
<input type="text"/>	<input type="checkbox"/>	RT20L-240V	6600	70	0.36	69.5%	0.82	95
<input type="text"/>	<input type="checkbox"/>	RT40L-240V	13000	142	0.72	69.0%	0.82	95
<input type="text"/>	<input type="checkbox"/>	RT60L-240V	19200	213	1.08	68.7%	0.82	95
<input type="text"/>	<input type="checkbox"/>	RT80L-240V	26000	283	1.44	N/A	0.82	95

### 277V Fixtures


Qty	✓	Fixture	Lumens	Watts	Amps	Current ATHD	PF	Efficacy (lm/w)
<input type="text"/>	<input type="checkbox"/>	RT20L-277V	6000	56	0.26	76.5%	0.79	105
<input type="text"/>	<input type="checkbox"/>	RT40L-277V	12000	112	0.51	76.7%	0.80	105
<input type="text"/>	<input type="checkbox"/>	RT60L-277V	18000	174	0.79	76.2%	0.79	105
<input type="text"/>	<input type="checkbox"/>	RT80L-277V	28000	266	1.19	73.2%	0.81	105

### Top Product Features

- Driverless LED with patented Wave Power Transformation Technology **WAVE™**
- Dirty power resistant / Power surge protection
- Stellar mesh networking
- Available in surface, suspended and continuous row mount
- Low operating temperature

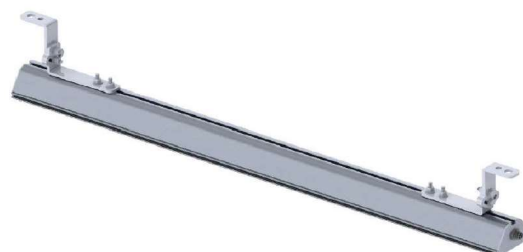

### Dimensions



**Client approval:** Please verify the voltage, quantities, and specifications on selected parts, then sign and date below.

Name: \_\_\_\_\_ Signature: \_\_\_\_\_ Date: \_\_\_/\_\_\_/\_\_\_